

# SPEED DOME CAMERA

## SPD S-Protocol User's Manual



REV. 1.30E

June 2009

Samsung Techwin Co., Ltd.  
Security and Image Solution Division

Copyright(c) 1996-2009 SAMSUNGTECHWIN CO.,LTD

## Preface

Samsung Techwin S-Protocol is Samsung Techwin's proprietary intellectual property protected by copyright law. All copy, reprint, and translation to other languages as a part of or all contents of this user's manual without permission of Samsung Techwin Co. Ltd. are expressly prohibited except for fair use within the scope of copyright law.

The contents of this manual may change without prior notice for the improvement of product performance. The design and specifications of Samsung Techwin's products compatible with this protocol also may change without prior notice for the improvement of product performance. Samsung Techwin shall not be liable, directly or indirectly, for any injury, loss, or damage caused by or alleged to be caused by or in connection with the use of the product.

Users are solely responsible for using the product and this user's manual as Samsung Techwin exercises no control over the use of this manual.

## Document Revision Info

Date	Description	Note
2009,02,21	Updated to a new document format	Ver 1.10
2009,03,17	English version published	Ver 1.10E
2009,04,27	Added 'PTZ Trace stop' and 'Target Lock on' of the second chapter. Added 'Track protocol'. Modified errors and Tilt Ranges.	Ver 1.20E
2009,06,30	PTZ Trace top deleted. Digital Zoom calculation added.	Ver 1.30E

**<Table of Contents>**


1.Protocol Frame Structure.....	3
1.1 Transmission Packet Format.....	3
1.2.Communication Timing Chart.....	3
1.3.Transmission Packet Format.....	4
2.Command.....	5
2.1 Pan/Tilt/Zoom/Focus/Brightness.....	5
2.2 OSD Menu Control.....	5
2.4 Product Initialization.....	6
2.5 Swing .....	7
2.6 Sequence Command.....	7
2.7 PTZ Trace.....	8
2.7.1 Set PTZ Trace.....	8
2.8 Set Pan/Tilt Position Move 1(Relative Movement).....	8
2.9 Set Pan/Tilt Position Move 2(Relative Movement).....	9
2.10 Special Command.....	9
3.Protocol Samples.....	12

# 1. Protocol Frame Structure

## 1.1 Transmission Packet Format

- Mode :RS-485/RS-422 Asynchronous Communication
- Transmit Direction :Simplex/Half duplex
- Start bit :1 bit
- Data bit :8 bits
- Parity bit :None
- Stop bit :1bit
- Baud rate :9600 bps

## 1.2. Communication Timing Chart

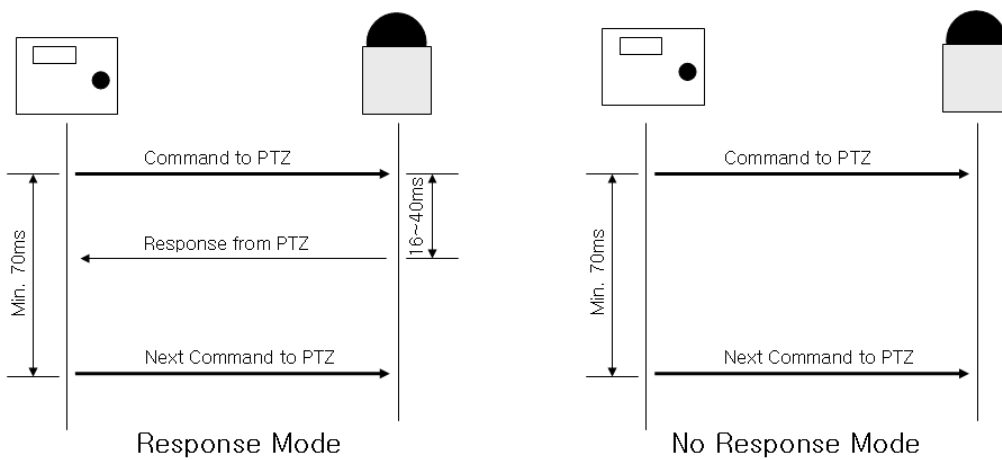


Pic 1. Pan/Tilt Operation Timing Chart

Please note that the Preset commands send a response only at the end of their executions.

The recommended minimum period of control signal communications is 70ms.

For the Pan/Tilt operation, setting up the communication period shorter than the recommendation may cause protocol loss or extend the response time of the camera.

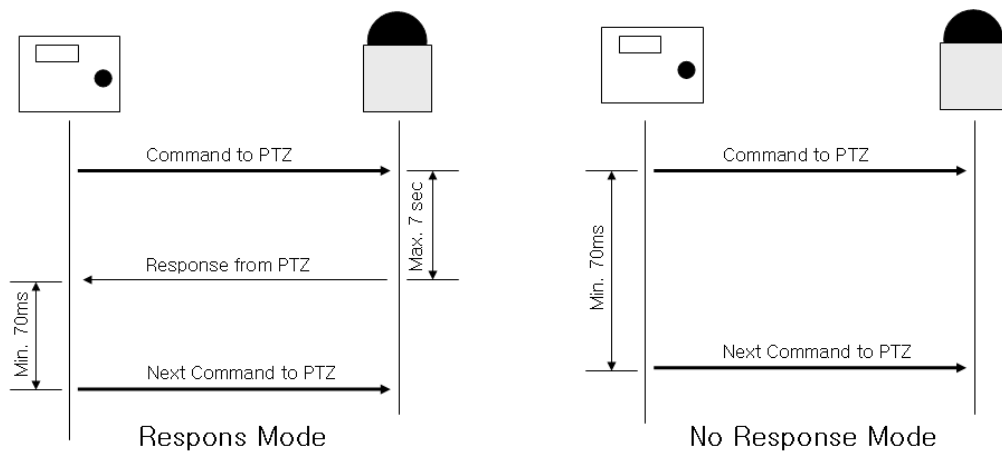

Pic 2. Other Commands Timing Chart

Aside from Pan/Tilt, other protocols send a response at the end of their executions depending on the situation; the response time of the camera may take up to 7 seconds.

### 1.3.Transmission Packet Format

<Command Packet Format>

Byte1	Byte2	Byte3	Byte4	Byte5	Byte6	Byte7	Byte8	Byte9	Byte10	Byte11
STX	Cam ID	Host ID	Cmd1	Cmd2	Data1	Data2	Data3	Data4	ETX	Checksum

-STX(Start of Text): A0h

-ETX(End of Text): AFh

-Cam ID: Dome ID(01h~FFh)

-Host ID: Host Controller ID(default:00h)

-Checksum: The value of Modulo 256 equal to a total of Byte2 to Byte9 processed by 'Logical Not(~)'

$$\text{Checksum} = \sim((\text{Byte } 2 + \dots + \text{Byte } 9) \& \text{FFh})$$

<Return Packet Format>

Byte1	Byte2	Byte3	Byte4	Byte5	Byte6	Byte7	Byte 8	Byte9	Byte10	Byte11
STX	Host ID	Cam ID	Cmd1	Cmd2	Data1	Data2	Data3	Error	ETX	Checksum

-Host ID:Controller ID

-Cam ID:Dome ID Number

-Error:Bit error codes are listed in the chart below.

	Description
bit7	
bit6	
bit5	Camera Module Failure
bit4	Pan/Tilt Failure
bit3	RAM of EEPROM Error
bit2	
bit1	
bit0	Unsuitable Data

## 2.Command

### 2.1 Pan/Tilt/Zoom/Focus/Brightness

Cmd1	Cmd2	Data1	Data2	Data3	Data4
Direction1	Direction2	Pan Speed	Tilt Speed	Zoom Speed /Focus Speed	XXh

The frame above is located at Byte4 to Byte9 in the command packet.

-Direction1~2 :

Direction1 is to process the Brightness and Focus commands.

Command1							
bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0
*	*	*	Brighter	Darker	*	Focus Near	Focus Far

Direction2 is to process the Zoom, Pan and Tilt commands as shown in the chart below.

Command2							
bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0
	Zoom Wide	Zoom Tele	Tilt Down	Tilt Up	Pan Left	Pan Right	always 0

Note: For these commands, bit0 must be retained as '0' at all times. Changing it to '1' fails to execute the commands shown in the chart above.

The speed of Pan, Tilt, Zoom, and Focus is available as shown below.

-Pan: 00h~3Fh

-Tilt: 00h~3Fh

-Zoom: 01h~08h

-Focus: 10h~80h

Note: The SPD-1000 does not support Zoom and Focus speeds.

**Important!: The Zoom and Focus commands cannot be transmitted simultaneously.**

## 2.2 OSD Menu Control

### 2.2.1 OSD(On Screen Display) Menu On:

Cmd1	Cmd2	Data1	Data2	Data3	Data4
00h	B1h	00h	00h	00h	00h

### 2.2.2 OSD Menu Off

Cmd1	Cmd2	Data1	Data2	Data3	Data4
00h	B1h	01h	00h	00h	00h

### 2.2.2 Menu Enter

Cmd1	Cmd2	Data1	Data2	Data3	Data4
01h	00h	06h	00h	00h	00h

\*The Focus command may be activated automatically in Normal (non-OSD Menu) mode.

### 2.2.3 Menu Cancel(Esc)

Cmd1	Cmd2	Data1	Data2	Data3	Data4
02h	00h	07h	00h	00h	00h

\*The Focus command may be activated automatically in Normal (non-OSD Menu) mode.

## 2.3 Preset Control

### 2.3.1 Set Preset (Saves preset commands.)

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	03h	P1	00h	00h	00h
Receive	"	"	"	"	"	Error

P1:Preset Number=0~FEh

### 2.3.2 Clear Preset (Deletes preset commands.)

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	05h	P1	00h	00h	00h
Receive	"	"	"	"	"	Error

P1:Preset Number=0~FEh

### 2.3.3 Goto Preset (Call saved preset commands.)

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	07h	P1	00h	00h	00h
Receive	"	"	"	"	"	Error

P1:Preset Number=0~FEh

The SPD-3300/3000/1000 supports these commands only from 0 to 7Fh.

## 2.4 Product Initialization

### 2.4.1 Pan/Tilt Position Initialization

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	0Dh	00h	00h	00h	00h
Receive	"	"	"	"	"	Error

### 2.4.1 Zoom Module Motor Position Initialization

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	0Fh	00h	00h	00h	00h
Receive	"	"	"	"	"	Error

## 2.5 Swing

### 2.5.1 Set Swing Speed & Time

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	13h	P1	P2	P3h	00h
Return	"	"	"	"	"	Error

P1: 00h=Pan Swing    01h=Tilt Swing    02h=Pan/Tilt Swing

P2: 00h ~ 40h Swing Speed

P3: 00h ~ 7Fh Swing Dwell Time(0 ~ 127sec)

### 2.5.2 Set Swing

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	19h	P1	P2	P3h	00h
Return	"	"	"	"	"	Error

P1: 00=Pan Swing    01h=Tilt Swing    02h=Pan/Tilt Swing

P2: 00h ~ FEh = First preset position

P3: 00h ~ FEh = Second preset position

### 2.5.3 Run Swing

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	1Bh	P1	00h	00h	00h
Return	"	"	"	"	"	Error

P1: 00h=Pan Swing    01h=Tilt Swing    02h=Pan/Tilt Swing

## 2.6 Sequence Command

### 2.6.1 Run Group

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	21h	P1	P2	00h	00h
Return	"	"	"	"	"	Error

P1: 00h ~ 05h Group number

P2: 00h=Performs the Group commands in ascending order.

01h=Performs the Group commands in random order.

### 2.6.2 Run Tour

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	25h	00h	00h	00h	00h
Return	"	"	"	"	"	Error



## 2.9 Set Pan/Tilt Position Move 2(Relative Movement)

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	00h	3Dh	P1	P2	P3	P4
Return	"	"	"	"	"	Error

P1: 00h=Pan 01h=Tilt

P2: 00h=Right(or Up) 01h=Left(or Down)

P3P4: Relative Movement Value (Pulse)

<p>Note!</p> <p>Camera Position Range per Model</p> <p>-SPD-2300/3000/3300:</p> <p style="padding-left: 20px;">Pan Range:0~64000, Tilt Range:794~34556</p> <p>-SPD-1000:</p> <p style="padding-left: 20px;">Pan Range:0~16851, Tilt Range:0~7662</p> <p>-SPD-3700/3750/3350:</p> <p style="padding-left: 20px;">Pan Range:0~44799, Tilt Range:0~23672</p>
---

## 2.10 Special Command

The following special commands are developed in response to SI industrial requests.

STX	Dome ID	Host ID	Cmd1	Cmd2	Data	ETX	CS
0xA0	ID	ID	<b>E0</b>	Command	Data1~Data4	0xAF	Check Sum

### 2.10.1 Call PT Position

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	01h	00h	00h	00h	00h
Return	"	"	P1	P2	P3	P4

P1P2: Pan Position (Pulse)

P3P4: Tilt Position (Pulse)

<p>Note!</p> <p>Camera Position Range per Model</p> <p>-SPD-2300/3000/3300:</p> <p style="padding-left: 20px;">Pan Range:0~64000, Tilt Range:794~34556</p> <p>-SPD-1000:</p> <p style="padding-left: 20px;">Pan Range:0~16851, Tilt Range:0~7662</p> <p>-SPD-3700/3750/3350:</p> <p style="padding-left: 20px;">Pan Range:0~44799, Tilt Range:0~23672</p>
---

**2.10.2 Call Zoom Position**

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	02h	00h	00h	00h	00h
Return	"	"	P1	P2	P3	P4

P1P2: Zoom Position (Pulse)

Only for models later than SPD-3750/3350/3700/3310/2700 Ver1.08,

P3: \* Digital Zoom

Digital Zoom Ratio\*10 : = 256\*10/(P3+1)

ex)P3:E7h → 11(1.1x)

P3:7Fh → 20(2.0x)

For older models and versions

P3P4: \* Digital Zoom 0~3 bit Flip: 4 bit

**2.10.3 Call Focus Position**

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	03h	00h	00h	00h	00h
Return	"	"	P1	P2	"	"

P1P2: Focus Position (Pulse)

The Focus value may vary depending on the calibration of lens VCLs.

**2.10.4 Move Pan & Tilt Position(Absolute Movement)**

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	04h	P1	P2	P3	P4
Return	"	"	"	"	"	"

P1P2: Pan Position(Pulse)

P3P4: Tilt Position(Pulse)

**2.10.5 Move Pan Position(Absolute Movement)**

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	05h	P1	P2	00h	00h
Return	"	"	"	"	"	Error

P1P2: Pan Position(Pulse)

**2.10.6 Move Tilt Position(Absolute Movement)**

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	06h	P1	P2	00h	00h
Return	"	"	"	"	"	Error

P1P2: Tilt Position(Pulse)

**2.10.7 Move Zoom Position(Absolute Movement)**

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	07h	P1	P2	P3	00h
Return	"	"	"	"	"	Error

P1P2: Zoom Position

P3: Digital Zoom Position

$$=(256/\text{Ratio}_X)-1$$

ex) Digital Zoom Ratio:1.1x → P3: E7h

Digital Zoom Ratio:2.0x → P3: 7Fh

Only models later than SPD-3750/3350/3700/3310/2700 Ver1.08 support Digital Zoom Position.

Note! Camera Zoom Range per Model -SPD-2300:0~1755 -SPD-3000/3300: 0~1770 -SPD-1000:0~1174 -SPD-3700/3750:0~1613 -SPD-3350:0~1608 -SPD-2700:0~1589
---

**2.10.8 Move Focus Position(Absolute Movement)**

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	08h	P1	P2	00h	00h
Return	"					Error

P1P2: Focus Position

The Focus value may vary depending on the calibration of lens VCLs.

**2.10.9 One Shot AF**

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	15h	00h	00h	00h	00h
Return	"					Error

**2.10.10 Target Lock On**

	Cmd1	Cmd2	Data1	Data2	Data3	Data4
Send	E0h	23h	00h	00h	00h	00h
Return	"					Error

### 3.Protocol Samples

The following commands are examples of protocols with the camera ID set to 01h.

Command	Protocol	Note
OSD ON	A0 01 00 00 B1 00 00 00 00 AF 4D	Menu ON
One shot AF	A0 01 00 E0 15 00 00 00 00 AF 09	
Call Zoom Pos.	A0 01 00 E0 02 00 00 00 00 AF 1C	
Call Pan Pos.	A0 01 00 E0 01 00 00 00 00 AF 1D	
Set Preset 3	A0 01 00 00 03 02 00 00 00 AF F9	
Call Preset 3	A0 01 00 00 07 02 00 00 00 AF F5	
Zoom Tele	A0 01 00 00 20 00 00 07 00 AF D7	
Zoom Stop	A0 01 00 00 00 00 00 00 00 AF FE	
Pan Right	A0 01 00 00 14 21 00 00 00 AF C9	Speed 34